
IDOPS®

YOUR RELIABLE PARTNER

BEST PARKING

Pallet type /Type DMF/

Much faster than the fastest!

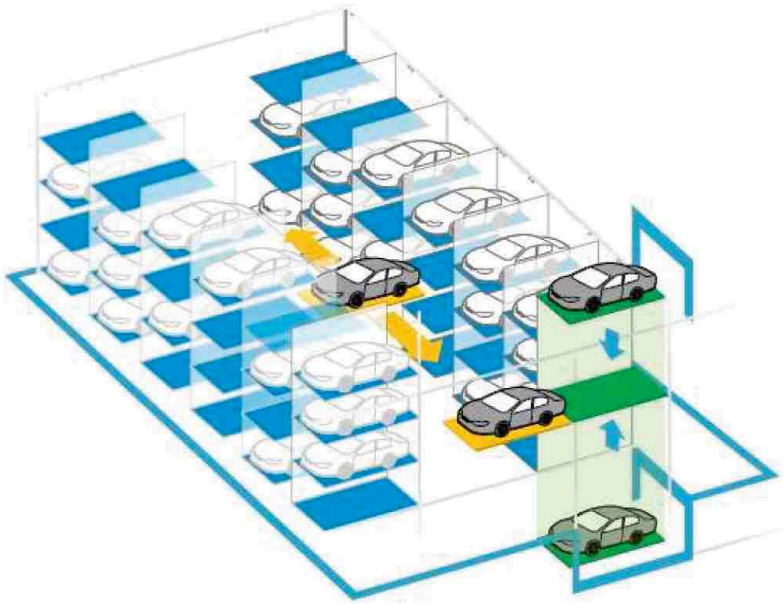

- **This parking facility is the latest generation of three-dimensional parking facilities which make possible for parking of maximum number of vehicles in the least amount of space quickly and safety**
- **BEST system can be applied for various sizes of spaces from 20 cars to several thousand cars depending on the number of lifts**
- **It is especially appropriate for large-scale parking lots, because of its huge modularity and great ability to fill also nonstandart space**
- **System consist of lifts for the vertical movement, carts for the transverse movement and park the cars in steel framed hangars on the cages**
- **Equiped with turn tables for better ergonomy and time saving operation (optional)**
- **Available for Sedan and SUV vehicles up to 3000 kg**
- **The system has the certificate of confirmation for EU**




Picture shows:

- **BEST parking system**
- **lengthwise sedan type**
- **height 7 stories**


IDOPS, cooperative, Hýrošova 3, 811 04 Bratislava, Slovak Republic, tel.: +421 2 59 309 106, fax: +421 2 59 309 105
e-mail: parking@idops.com, www.idops.com

IDOPS®

YOUR RELIABLE PARTNER

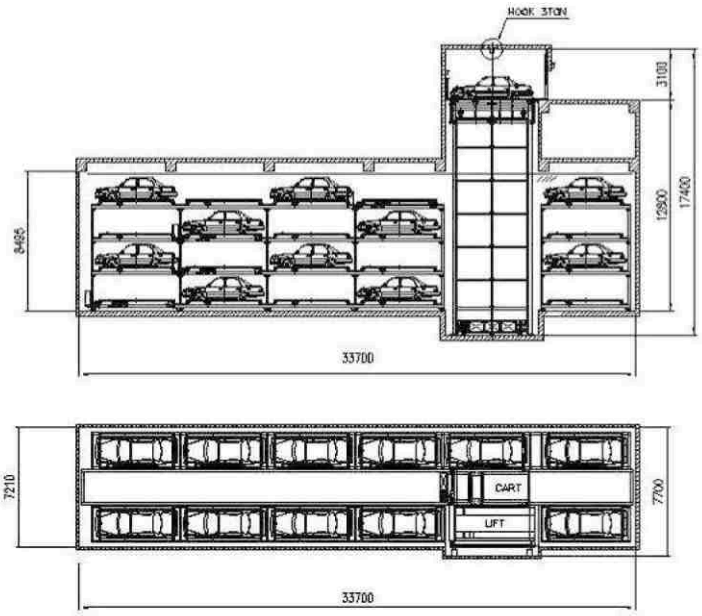

BEST lengthwise type - Sedan

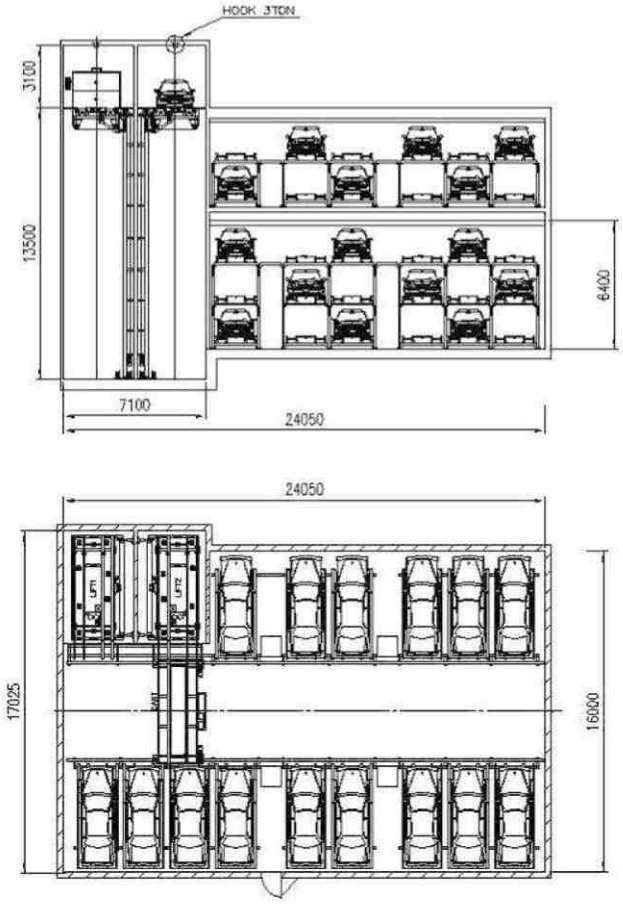

BEST lengthwise type - SUV

Standard details		
Capacity	20 - 600 cars	
Available dimensions of the car	Sedan 5200 (L) x 2150 (W) x 1600 (H)	SUV 5200 (L) x 2150 (W) x 1900 (H)
Weight of available car	Sedan 2150 kg	SUV 3000 kg
Lifting	hoisting motor - 22 kW geared brake motor	
	hoisting speed - 45≈60 m/min (in proportion to lifting distance)	
	horizontal movement motor - 1,5 kW	
	horizontal moving speed - 45 m/min	
Cart	running motor - 1,5 kW	
	sunning speed - 80≈120 m/min (in proportion to the travelling distance)	
	horizontal movement motor - 1,5 kW	
	horizontal moving speed - 45 m/min	
	picking motor - 0,4 kW	
	type of picking - rack & pinion	
Turn table rotation	MOTOR - 3kW	
	SPEED - 3,5 rpm	
Safety devices	■ induction and guidance lights at the entrance ■ equipment detecting the right place of the automobiles at the entrance ■ fall preventing equipment ■ system detecting cutting of the hoisting wire ■ and others	
Power	AC 380V, three phase and four lines way, 50 Hz	

© IDOPS 2010 PDS APS /BEST/ 2010 - 001

Remark: The specification on this PDS could be changed without notice according to the technical development. All dimensions are in mm.

IDOPS, cooperative, Hýrošova 3, 811 04 Bratislava, Slovak Republic, tel.: +421 2 59 309 106, fax: +421 2 59 309 105
e-mail: parking@idops.com, www.idops.com