
IDOPS®

YOUR RELIABLE PARTNER

OPTIMA PARKING

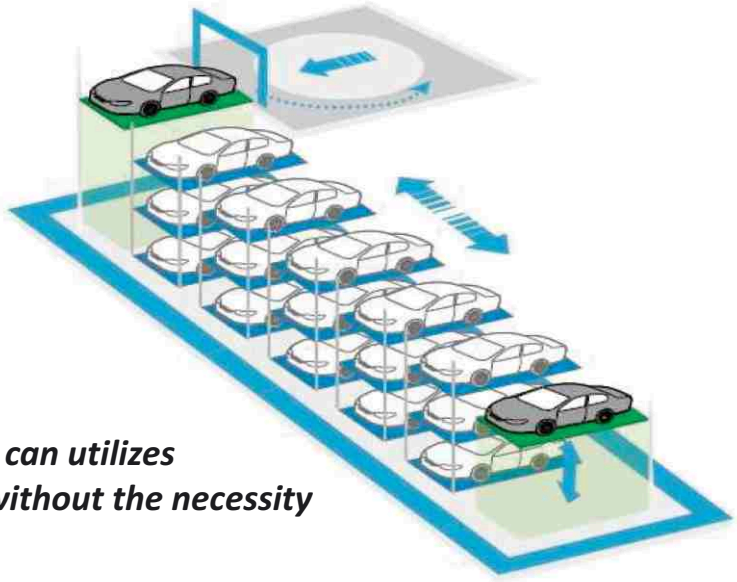

Multi - circulation type /Type DMC/

The most efficient Parking Facilities that can utilizes completely the underground to the full without the necessity of the driveways!

- **This is an automated system which moves vehicles vertically by lifts at both ends and horizontally rotates the connected pallets sequentially to park them in multi-floor parking spaces**
- **Optima system is 8 times more efficient in a space usage than a conventional parking**
- **Best suitable for middle and small size buildings**
- **The system operates with minimum of noise and vibrations**
- **Optima system can be equiped with turn tables for better ergonomy, time saving operation, easy entry and exit**
- **Available for Sedan and SUV vehicle up to 3000 kg**
- **Wide range of modularity from 10 up to 46 cars, from 2 up to 4 levels and 6 up to 13 columns**
- **The costs per parking space are low**
- **The system has the certificate of confirmation for EU**




Picture shows:

- **OPTIMA system for 42 cars**
- **4 levels**
- **12 columns**
- **Sedan car type**
- **upper drive in**
- **without turn table**

IDOPS, cooperative, Hýrošova 3, 811 04 Bratislava, Slovak Republic, tel.: +421 2 59 309 106, fax: +421 2 59 309 105
e-mail: parking@idops.com, www.idops.com

YOUR RELIABLE PARTNER

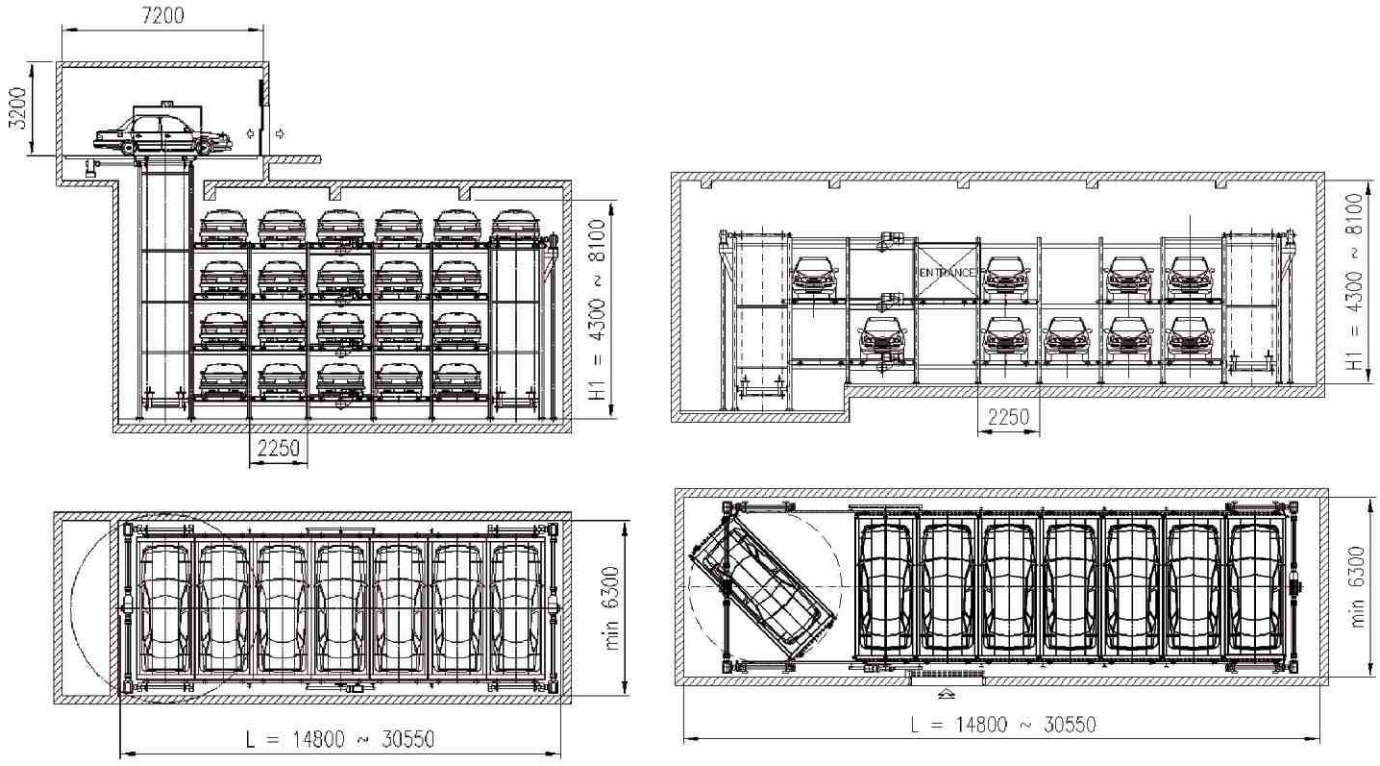

OPTIMA - Sedan **OPTIMA - SUV**

Standard details		
Capacity	Depends on the size of the site (max 46 cars)	
Available dimensions of the car	Sedan 5200 (L) x 2150 (W) x 1600 (H)	SUV 5200 (L) x 2150 (W) x 1900 (H)
Weight of available car	Sedan 1850 kg	SUV 3000 kg
Lifting	MOTOR - 11≈15 kW Geared brake motor	
	SPEED - approx 20≈25 m/min	
Horizontal moving	MOTOR - 3,75≈5,5 kW Geared brake motor	
	SPEED - approx. 20 m/min	
Safety devices	■ mechanical trouble detecting and indicating function ■ frontal induction light at the entrance ■ equipment detecting the right place of the automobiles at the entrance ■ fall preventing equipment ■ and others	
Power	AC 380V, three phase and four lines way, 50 Hz	

© IDOPS 2010 PDS APS /OPTIMA/ 2010 - 001
Remark: The specification on this PDS could be changed without notice according to the technical development. All dimensions are in mm.

IDOPS, cooperative, Hýrošova 3, 811 04 Bratislava, Slovak Republic, tel.: +421 2 59 309 106, fax: +421 2 59 309 105
e-mail: parking@idops.com, www.idops.com